


BOMBAS SUBMERSAS - SELEÇÃO DE CURVAS

SÉRIE
6AT30

Curva de Performance 6AT30 - 60Hz - 3.450/min

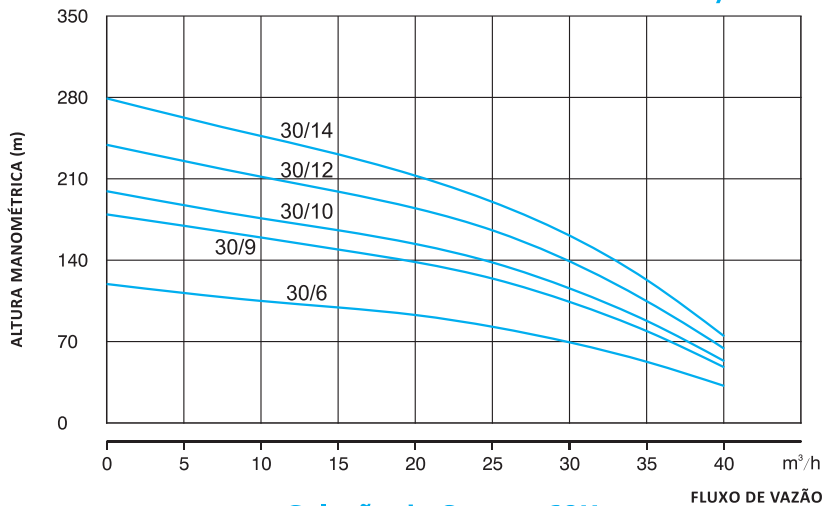


Seleção de Curva - 60Hz

MODELO	POTÊNCIA		AMPERAGEM		DN	m³/h	3.450 r/min									
							TRIFÁSICO	220V / 380V	0	10	15	20	25	30	35	40
6AT30/06	9.2	12.5	41.8	20.5	3"	MCA	120	105	100	92	83	69	52	32		
6AT30/09	13	17.5	58	25.5	3"		181	158	150	138	125	104	79	48		
6AT30/10	15	20	65.7	32.5	3"		201	176	167	153	139	116	88	53		
6AT30/12	18.5	25	72	42	3"		241	211	201	184	166	139	105	64		
6AT30/14	22	30	85	49	3"		282	246	234	216	194	163	123	75		

BOMBAS SUBMERSAS - SELEÇÃO DE CURVAS

SÉRIE
6AT45

Curva de Performance 6AT45 - 60Hz - 3.450/min

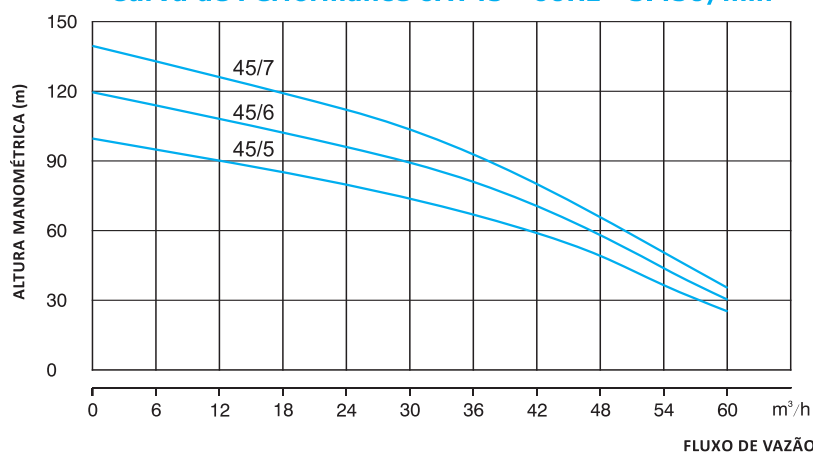

Seleção de Curva - 60Hz

MODELO	POTÊNCIA		AMPERAGEM		DN	m³/h	3.450 r/min									
							TRIFÁSICO	220V / 380V	0	24	30	36	42	48	54	60
6AT45/05	11	15	51	22.5	3"	MCA	100	80	75	66	59	49	36	25		
6AT45/06	13	17.5	58	25.5	3"		120	97	90	80	71	59	44	30		
6AT45/07	15	20	65.7	32.5	3"		141	113	105	93	83	69	51	35		